


► **REPLACEMENT BLADE CARTRIDGE INSTALLATION**

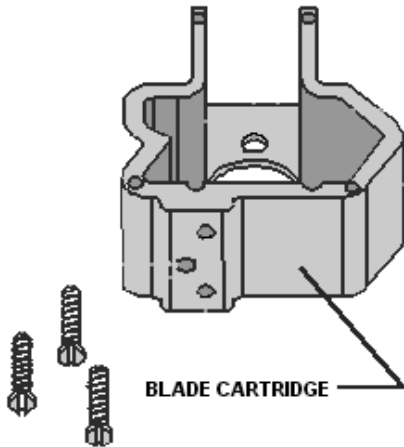


**ASSEMBLE-DISASSEMBLE PROCEDURE**

View Placement of **TOP PLATE**, **BOTTOM PLATE**, **CARTRIDGE SPRING**, and **BLADE CARTRIDGE**, before disassembling cutter head. Note position of **BLADE CARTRIDGE** and top plate center tube.

Cartridge blades slide into slots in center tube, it will only fit one way. Note location and position of **CARTRIDGE SPRING**, and **BRASS STANDOFFS**.

Place Cartridge into position, align with slots in Center Tube. **Important:** Do not over tighten **TOP PLATE SCREWS**.

Push cartridge back and forth into slots, to ensure proper placement before using. Be sure to check spring action, tight against end stop and cartridge.

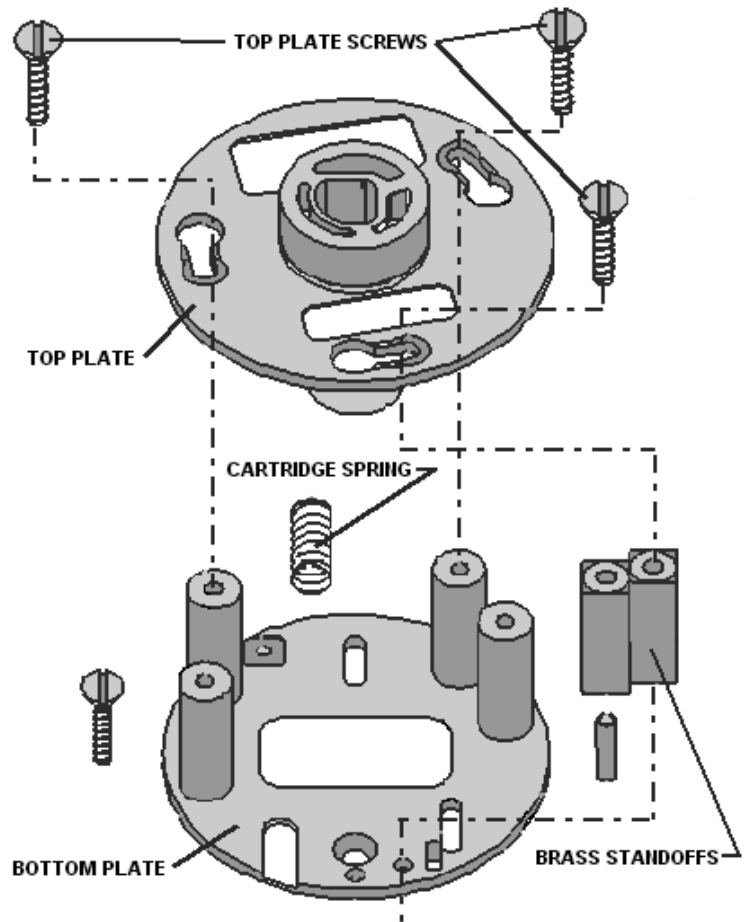

**MADE IN U.S.A.**



**Coastel Cable Tools International Corp.**

1211 South Salina Street  
Syracuse, New York 13202 USA  
1-315-471-5361 FAX 1-315-472-1765



**1-800-451-7615**

[www.CoastelTools.com](http://www.CoastelTools.com)

