

► CUTTER HEAD SETUP

For 700 Series, 747-CPP, & C-TEL 1066 Strippers

Blade Spacing, (preset strip length) is Set at the Factory

The strip length required is determined by the connector type and make that is used. **When ordering Cutter Heads please give Connector manufacturer name and model as well as cable type.**



Coastel Cutter Heads are made for the strip length and cable that is specified. When properly adjusted (for blade depth, see diagram above) nicks, scoring, and blemishes are eliminated.

The cut ends or slugs are removed either manually or by using any style end removal tool. Techniques are shown in the Coastel "Tool Operation Manual".

CUTTER HEADS CAN BE ORDERED FOR ANY STRIP CONFIGURATION WITHIN THE LIMITATIONS SHOWN ON THE ILLUSTRATION ABOVE.

Special tooling is available for non-standard applications. Pricing for non-standard tools will be quoted upon request. (Non-standard to include special requirements or custom stripping for coaxial, triaxial, semi rigid, heliax and AWG wire.

Typical 3-Level Strip Showing Blade Depth Adjustment

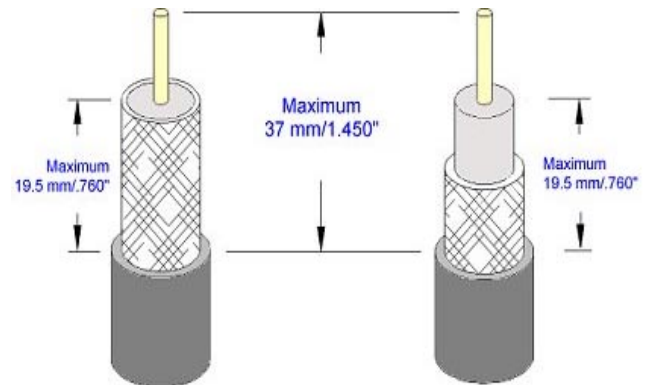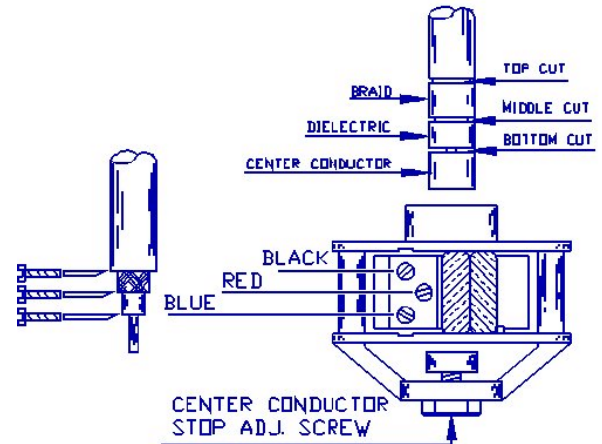

MADE IN U.S.A.



Coastel Cable Tools International Corp.

1211 South Salina Street
Syracuse, New York 13202 USA
1-315-471-5361 FAX 1-315-472-1765



1-800-451-7615

www.CoastelTools.com

